


STORMWATER POST-CONSTRUCTION TREATMENT DEVICE OPERATIONS & MAINTENANCE

Work Furlough Visiting Park 345 Skyway Dr, Camarillo

Devices On-Site:

Swale

Catch Basin Insert

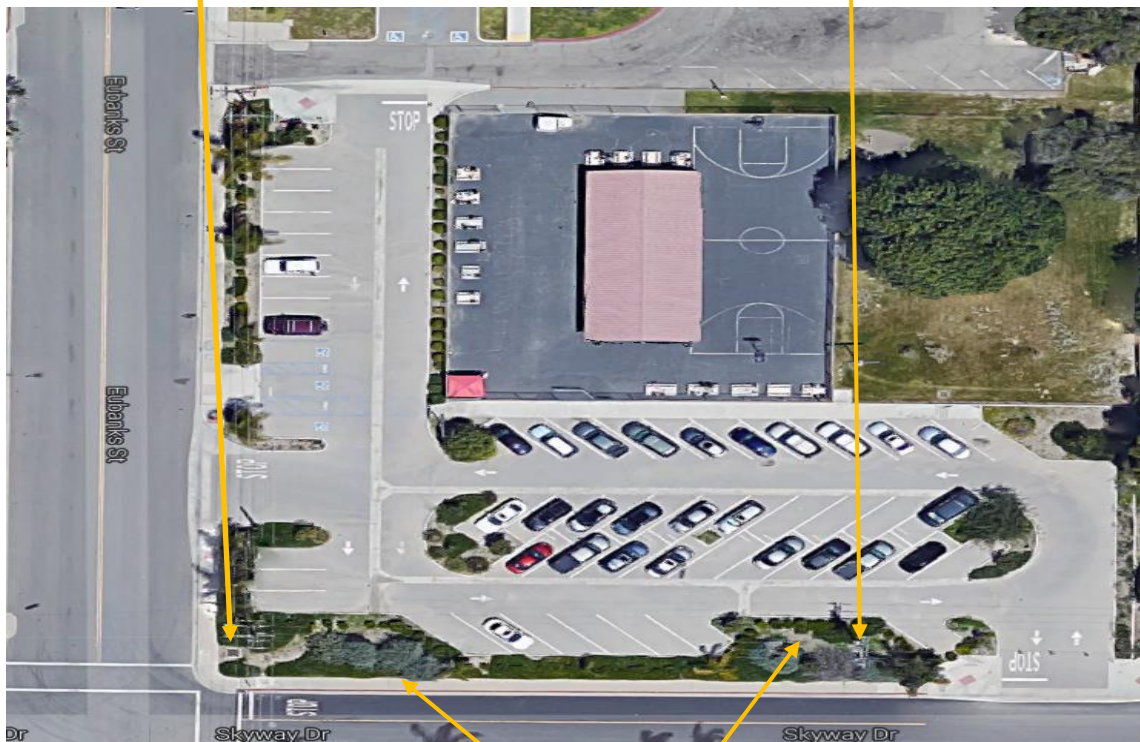

Swale

Operations & Maintenance Plan

Date: _____ O & M Personnel: _____ Signature: _____

O & M Frequency: Pre-Wet Season (before Oct 1) Post-Wet Season (after April 15) After Storm

Catch Basin Insert			
Activity	O & M Needed	O & M Completed	Comments / Maintenance Performed
Remove Trash/Debris/Sediment			
Inspect for Tears, Holes, Bending, and Missing Hangers			
Replace Filter Medium Pouches Annually			

http://www.biocleanenvironmental.com/product/grate_inlet_skimmer_box

Swale			
Activity	O & M Needed	O & M Completed	Comments / Maintenance Performed
Remove Trash/Debris/Sediment			
Assess for Poor Vegetative Health (i.e. Weeds, loss of ground cover, grass > 6" tall)			
Repair Erosion/Scouring			
Repair and clear blockages of inlet/outlets			
If Standing Water is present 4 days after rain event, maintenance is needed immediately to restore proper drainage. (See O & M details in 2011 Technical Guidance Manual Chapter 6 Page 152)			

*2011 Technical Guidance Manual is available under Publications/Manuals @ <http://vcstormwater.org>